



FEATURES

- Microswitch activator
- Activation delay
- Integral alarm activated LED for user reassurance

DESCRIPTION

The disabled toilets alarm series is a range of easy to install and easy to operate equipment, designed to enable you and your clients to install vandal resistant disabled toilets alarm systems.

Ceiling pull cords are used by users to activate disabled toilets alarms.

Usually one or more emergency call points and or ceiling pull cords are mounted inside the toilet to enable users to call for assistance.

The unit is fitted with an LED that is illuminated on alarm to provide user reassurance.

The pull cord must be held for at least 0.25 seconds to reduce the risk of accidental alarm activation.

PART NUMBERS

DT7520.00

Ceiling pull cord with integral beacon LED


SPECIFICATIONS

Enclosure:	Plastic
Dimensions:	Diameter: 78 mm (approx.)
Power:	Line powered



CONNECTIONS

Pull Switch

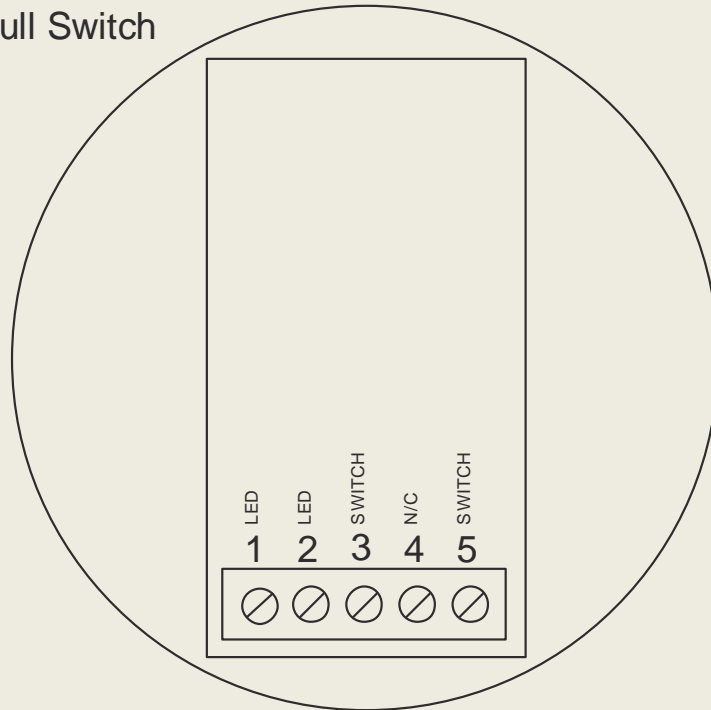

DESIGNED FOR LIFE

At Folknoll all equipment is designed by experience engineers for easy installation, simple configuration, straightforward operation, low maintenance and high reliability.

CUSTOM UNITS

Folknoll is a customer focused company. If you need special software features, custom made units or larger systems, then please contact Folknoll to discuss your requirements.

FURTHER INFORMATION

Please contact us for further information about the wide range of Folknoll products and systems.

Folknoll Group, Old North Rd, Royston, HERTS, SG8 5DT, UK

Tel: +44 (0) 1763 234567

Email: sales@folknoll.co.uk

www: www.folknoll.co.uk