



FEATURES

- Vandal resistant call button
- Activation delay
- Internal anti-tamper switch
- Can be flush or surface mounted in 35mm single gang back box (not supplied)
- Available in brush finished stainless steel or white painted mild steel

DESCRIPTION

The disabled toilets alarm series is a range of easy to install and easy to operate equipment, designed to enable you and your clients to install vandal resistant disabled toilets alarm systems.

Beacon sounder units are used as local alarm annunciators.

One or more of these units is usually mounted on a wall at a strategic location outside of the toilet to attract attention in the event of an alarm.

The unit is fitted with a red LED beacon and an integral sounder.

An active alarm is indicated by an illuminated beacon and active sounder.

The standard unit is annotated in black with the words **ASSISTANCE REQUIRED**; alternative annotation is available on request.

The unit can be mounted in a double gang 35mm flush or surface mount back box (not supplied).

-continued overleaf-



PART NUMBERS


DT7520.28 Beacon sounder, horizontal, stainless steel

SPECIFICATIONS

Fascia: Brush finished stainless steel
Mounting: 35mm double gang back box (not supplied)
Dimensions: Width: 146 mm, height: 86 mm Depth <35 mm (approx.)
Power: Line powered

CONNECTIONS

Beacon/Sounder Unit

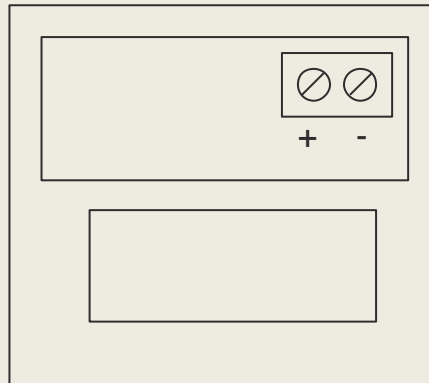

DESIGNED FOR LIFE

At Folknoll all equipment is designed by experience engineers for easy installation, simple configuration, straightforward operation, low maintenance and high reliability.

CUSTOM UNITS

Folknoll is a customer focused company. If you need special software features, custom made units or larger systems, then please contact Folknoll to discuss your requirements.

FURTHER INFORMATION

Please contact us for further information about the wide range of Folknoll products and systems.

Folknoll Group, Old North Rd, Royston, HERTS, SG8 5DT, UK

Tel: +44 (0) 1763 234567

Email: sales@folknoll.co.uk

www: www.folknoll.co.uk