



VANDAL RESISTANT PULL CORD UNIT

BS8300:2009 COMPLIANT

3000mm cord

2 pull handles for high and low level activation

Reassurance LED illuminates on alarm

Can be daisy chained for multiple alarm points

Stainless steel faceplate

Anti-tamper fixings available

Mounts in flush or surface single gang back box

Ideal for public places, hospitals, hotels etc.

Compatible with Folknoll remote monitoring

DISABLED TOILET ALARMS

Our vandal resistant BS8300:2009 compliant disabled toilet alarm system provides cost-effective solutions built from standard and bespoke units. Our toilet alarms can be combined with disabled refuge EVC, fire telephone and other systems. Ideal for shops, offices, hotels and other public spaces.

PULL CORD UNITS

Pull cords, alarm strips and call points are used to call for assistance in emergency. The units are mounted in strategic locations in accordance with current standards, enabling distressed persons to activate alarms. Depending on the system configuration, beacons, sounders and remote monitoring units will be used to alert staff and others to respond to incidents.

DT7520.01 PULL CORD STAINLESS

Our DT7520.01 Pull Cord Stainless is a vandal resistant stainless steel, wall or ceiling mount, alarm pull cord unit.

PULL CORD HANDLES

The unit is usually supplied with 3000mm cord and two pull handles offering high and low level activation points. The handles can be located anywhere along the cord to comply with local regulations, specifications and requirements. Alternative cord lengths and additional pull handles are available on request.

REASSURANCE LED

Depending on system configuration the reassurance LED is either illuminated to indicate alarm or flashed to indicate alarm and illuminated to indicate acknowledge. Illuminating the LED reassures users that the alarm has been activated or help has arrived.

FACEPLATE

The standard faceplate is made from brushed finish stainless steel. Alternative finishes are available on request.


MOUNTING

The unit can be wall or ceiling mounted in a flush or surface mount, 35mm, single gang back box (not supplied).

SPECIFICATIONS

Pull cord:	3000mm cord with 2 pull handles for high and low level activation
Indicator:	Red reassurance LED, illuminates on activation
Faceplate:	Stainless steel, brushed finish
Mounting:	35mm single gang back box (not supplied)
Dimensions:	Width: 86mm, height: 86mm, depth: < 35mm (approx.)
Power:	12V / 24V (Usually supplied from battery backed system PSU)

CONNECTIONS

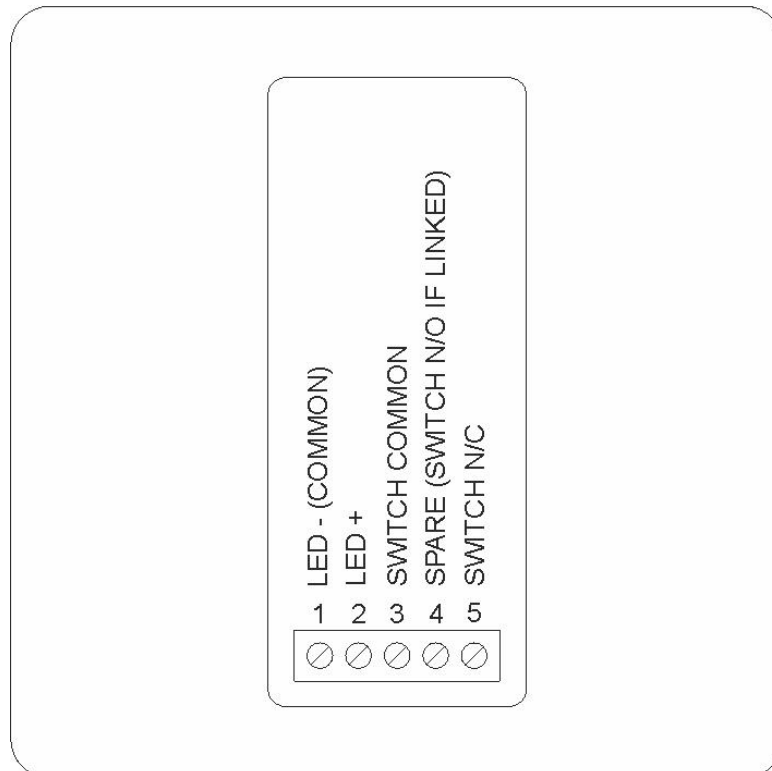

ABOUT FOLKNOLL

We are a UK based systems design, manufacturing and installation company. Since 1975 we have been supplying tough, reliable, practical, alarm and control systems for the private and public sectors. All of our products and systems have been designed for easy installation and low maintenance by experienced engineers. As original manufacturers, all of our products and systems can be customised to suit your requirements. We offer custom engraving, special finishes and bespoke features for all of our equipment.

GET IN TOUCH

Please contact us for further information about our wide range of products and services, and find out how we can provide a solution for you.



 **Folkno Group Ltd.**
Old North Rd, Royston, HERTS, SG8 5DT, UK
+44 (0) 1763 234567
sales@folkno.co.uk www.folkno.co.uk