



DT7540.00F ALARM RESET BASIC



- Vandal resistant reset button and alarm controller
- BS8300:2009 COMPLIANT
- Illuminated reset button with activation delay
- Button illuminates on alarm
- Alarm output
- Input for pull cords
- Output for over-door beacon sounders
- Stainless steel faceplate
- Anti-tamper fixings available
- Mounts in flush or surface single gang back box
- Compatible with Folknoll remote monitoring

DISABLED TOILET ALARMS

Our vandal resistant BS8300:2009 compliant disabled toilet alarm system provides cost-effective solutions built from standard and bespoke units. Our toilet alarms can be combined with disabled refuge EVC, fire telephone and other systems. Ideal for shops, offices, hotels and other public spaces.

ALARM RESET UNITS

Our reset units are local alarm controllers with integral reset buttons. The units continually monitor pull cords and other alarm activation points triggering beacon sounders etc. when an alarm is activated. The integral reset button is used by responders to cancel the alarm after the incident has been resolved. Reset units are usually installed inside the toilet or alarm zone to ensure alarm responders visit the location in response to an alarm.

FOLKNOLL TOILET ALARMS CANNOT USUALLY BE RESET REMOTELY

DT7540.00F ALARM RESET BASIC

The DT7540.00F Alarm Reset Basic offers a standard reset unit with an illuminated reset button. The faceplate is made from brush finished stainless steel and annotated in black with the word **RESET**. Other finishes and alternative annotation is available on request. This unit can be mounted in a 35 mm flush or surface single gang back box (not supplied).

ILLUMINATED RESET BUTTON


The reset button resets or cancels the alarm. To reduce the risk of accidental alarm reset the button must be held for a minimum of 0.25 seconds. On alarm activation the button illuminates giving a visible indication of alarm activation inside the toilet.



SPECIFICATIONS

Faceplate: Brush finished stainless steel with black annotation
 Mounting: 35 mm single gang back box (not supplied)
 Dimensions: Width: 86 mm, height: 86 mm, depth: < 35 mm (approx.)
 Power: 12 / 24 Vdc (Usually supplied from battery backed system PSU)

CONNECTIONS

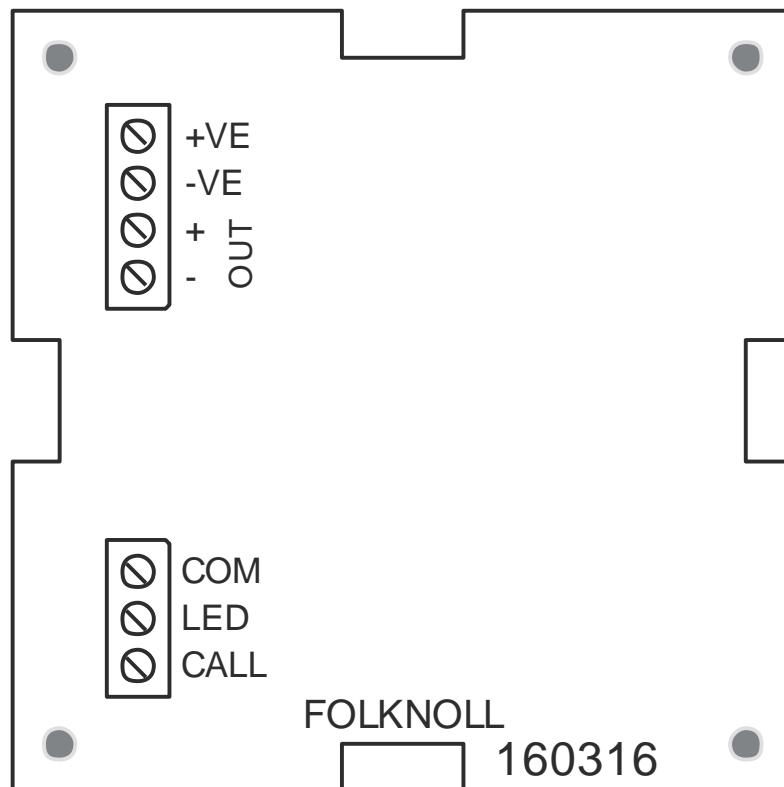

ABOUT US

We are a UK based company with over 30 years of design and manufacturing experience. All of our products and systems are designed for toughness, reliability, easy installation, simple configuration, straightforward operation and low maintenance. As original manufacturer all of our product ranges can be customised to suit your application. Including custom engraved panels, additional features and special systems.

Please contact us for further information about our wide range of products and services and find out how we can provide a solution for you.



Old North Rd, Royston, HERTS, SG8 5DT, UK
 +44 (0) 1763 234567
 sales@folknoll.co.uk www.folknoll.co.uk