**EMERGENCY ASSISTANCE ALARMS** 



# VANDAL RESISTANT ALARM CONTROLLER WITH RESET BUTTON

Illuminated reset button with activation delay
Input for pull cords, call points, etc.
Output for beacon sounders
Tough, stainless steel, construction
Mounts in standard UK, 35mm, single gang back box
Anti-tamper fixings available

Suitable for use in public areas

## **EMERGENCY ASSISTANCE ALARMS**

Folknoll emergency assistance alarm systems offer cost-effective, vandal resistant, **BS 8300-2** and **DOCUMENT M** compatible solutions built from standard and bespoke units. Our alarms can be combined with disabled refuge EVCS and other systems. Ideal for **SHOPS**, **OFFICES**, **HOTELS** and other **PUBLIC SPACES**.

## FOLKNOLL ALARM CONTROLLER RESET UNITS

Our reset units are local alarm controllers with integral reset buttons. These units continually monitor pull cords, call points, etc. activating beacon sounders and other indicators when an alarm is triggered. The reset button is used to cancel and reset the alarm after an incident has been resolved. Reset units are usually installed inside the alarm zone to ensure alarm responders visit the location in response to an alarm.

## DT7540.00F: ALARM RESET BASIC

The DT7540.00F Alarm Reset Basic offers a basic alarm controller with an illuminated reset button. The faceplate is made from brushed finish stainless steel and annotated in black with the word **RESET**. Other finishes and alternative annotation are available on request.

#### **ILLUMINATED RESET BUTTON**

The reset button resets (cancels) the alarm. To reduce the risk of accidental alarm reset the button must be held for a minimum of 0.25 seconds. The button illumination indicates the current alarm state to reassure users that the alarm has been activated, etc.

#### **MOUNTING**


This unit is suitable for mounting in a standard UK, 35mm, single gang back box.

## **SPECIFICATIONS**

Button: Vandal resistant, red LED illuminated push button
Controller: Basic alarm system, no acknowledge function
Faceplate: Brushed finish stainless steel, with black annotation
Mounting: Standard UK, 35mm, single gang back box (not supplied)
Dimensions: Width: 86mm, height: 86mm, depth: <35mm (approx.)

Power: 12Vdc / 24Vdc

## **CONNECTIONS**

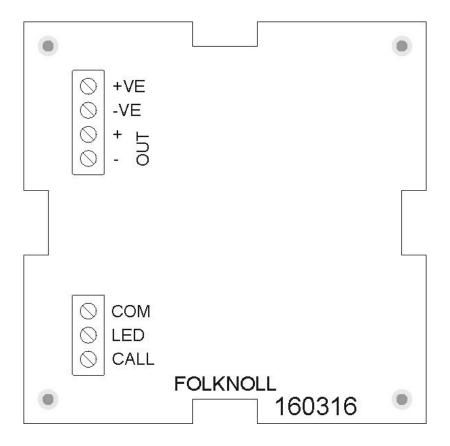

## ABOUT FOLKNOLL

We are a UK based systems design, manufacturing and installation company. Since 1975 we have been supplying tough, reliable, practical, alarm and control systems for the private and public sectors. All of our products and systems have been designed for easy installation and low maintenance by experienced engineers. As original manufacturers, all of our products and systems can be customised to suit your requirements. We also offer individual annotation, custom engraving and special finishes for all of our equipment.

## **GET IN TOUCH**

Please contact us for further information about our wide range of products and services and find out how we can provide a solution for you.



+44 (0) 1763 234567

enquiries@folknoll.co.uk