



IP66 WATER RESISTANT ALARM CALL POINT

Large pneumatic 'button' connected to pneumatic switch by tube

No electrical parts in wet area

Tough, polished chrome faceplate

Suitable for flush mounting in single gang back box

Choice of button colours

Ideal for showers, bathrooms, pool areas, etc.

Compatible with all Folknoll disabled toilet / emergency assist systems

DISABLED TOILET ALARM

Our resistant BS 8300:2009 compliant disabled toilet alarm system provides cost-effective solutions built from standard and bespoke units. Our toilet alarms can be combined with disabled refuge EVC, fire telephone and other systems. Ideal for shops, offices, hotels and other public spaces.

DISABLED TOILET / EMERGENCY ASSIST ALARM CALL POINTS

Call points are typically used to activate alarms. Multiple call points, pull cords and alarm strips can be installed to increase coverage of the protected area. Typically, when an alarm is activated a beacon sounder outside the protected area is activated to attract attention. Larger installations may also have remote IP / telephone /etc. monitoring stations reporting alarms to staff who can arrange assistance.

DT 7800-134 CALL POINT, PNEUMATIC, CHROME, GREEN

Our DT 7800-134 Call Point, Pneumatic, Chrome, Green offers a large water-resistant alarm call point. The faceplate is made from polished chrome and annotated in black with the words **PRESS FOR ASSISTANCE**. Other finishes, button colours and alternative annotation are available on request.

CALL 'BUTTON'

The call 'button' is a large, finger or palm operated pneumatic bellows made from tough thermoplastic. The bellows connect to a remote pneumatic switch by a pneumatic tube. The pneumatic switch and all electrical parts are mounted in a secure location away from the call 'button'.

MAKING THIS DEVICE SUITABLE FOR USE IN 'WET' AREAS

ACTIVATION DELAY

Our disabled toilet alarm systems have a built-in activation delay of 0.25 seconds to reduce the risk of accidental calls. The call button must be held down for a fraction of second to activate an alarm.

MOUNTING

This unit can be mounted in a 35mm, flush, single-gang, back box (not supplied).

IF MOUNTED ON AN UNEVEN SURFACE THE FACEPLATE MUST BE SEALED WITH A WATERPROOF SEALANT


APPLICATION

Suitable for use with Folknoll disabled toilet / emergency assist alarm systems, ideal for 'wet' locations showers, bathrooms, gyms, pool areas, etc

SPECIFICATIONS

Faceplate:	Polished chrome, with black annotation
Dimensions: (excluding button)	Width: 86mm, height: 86mm, depth: < 35mm (approx.)
Mounting:	35mm, single gang, back box (not supplied)
Button:	Large thermoplastic 'button' (choice of colours)
Ingress protection:	IP66

TYPICAL APPLICATION

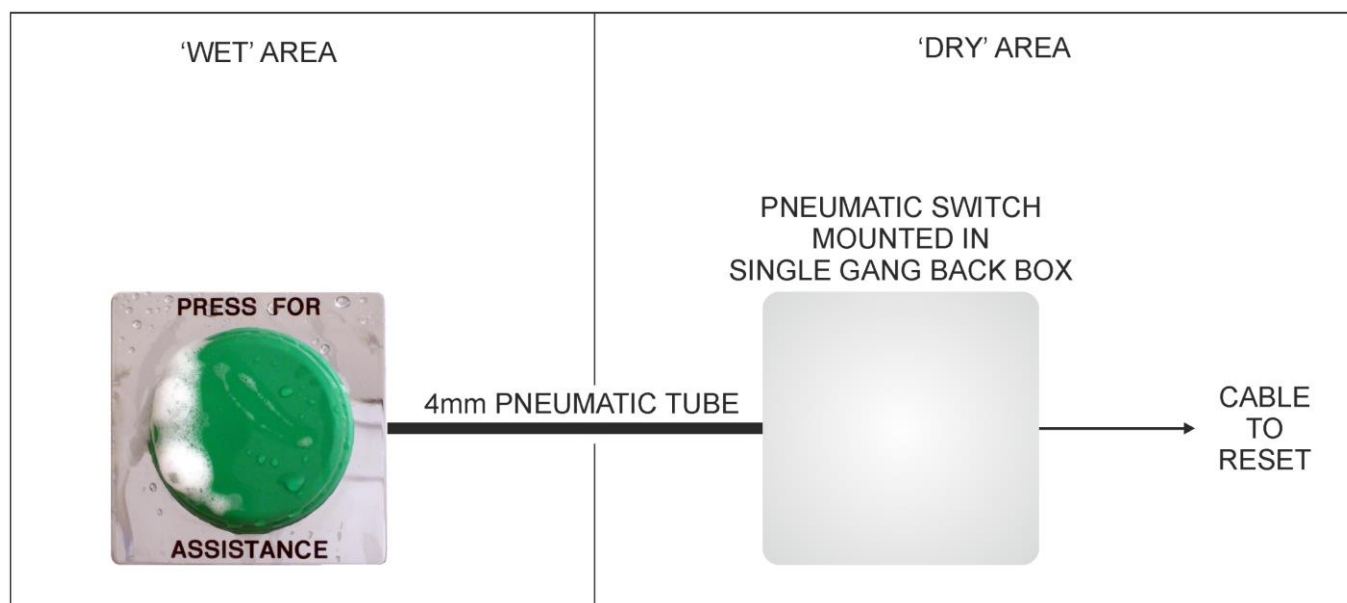

ABOUT FOLKNOLL

We are a UK based systems design, manufacturing and installation company. Since 1975 we have been supplying tough, reliable, practical, alarm and control systems for the private and public sectors. All of our products and systems have been designed for easy installation and low maintenance by experienced engineers. As original manufacturers, all of our products and systems can be customised to suit your requirements. We offer custom engraving, special finishes and bespoke features for all of our equipment.

GET IN TOUCH

Please contact us for further information about our wide range of products and services, and find out how we can provide a solution for you.



Folknoll Group Ltd.

Old North Rd, Royston, HERTS, SG8 5DT, UK

+44 (0) 1763 234567

sales@folknoll.co.uk www.folknoll.co.uk