



DT7550.80 LCD INDICATOR PANEL FOR DISABLED TOILET ALARM



- Alarm indicator panel for up to 8-off disabled toilet alarms (64-off with additional controllers)
- Alerts staff to alarms and faults
- 16 character LCD display
- Vandal resistant mute button
- Integral sounder
- Output for auxiliary beacons / sounders
- Vandal resistant stainless steel construction
- Flush or surface mount anti-tamper fixings
- Surface or flush mount
- Suitable for use in public areas

DISABLED TOILET ALARM

Our vandal resistant BS8300 compliant disabled toilet alarm system provides cost-effective solutions built from standard and bespoke units. We offer stand-alone toilet alarms, multiple toilet alarms with remote monitoring and combined systems with disabled refuge EVC, fire telephone, building alarms, etc. Interfaces for BMS and transmission over IP are available. Ideal for shops, offices, hotels, factories and similar locations.

DT7550.80 LCD INDICATOR PANEL

The DT7550.80 LCD Indicator Panel monitors and displays the current state of up to 8-off toilet / emergency assistance alarms (64-off with additional controllers).

One or more indicator panels can be installed in central monitoring station(s) or control room(s) to attract the attention of system operators in the event of alarm activation. Panels can be used 'stand-alone' to monitor up to 8-off alarms, or combined with additional controllers to monitor up to 64-off alarms.

Panels can be daisy chained to provide alarm indication at multiple locations. Panels have an alarm output for use with additional equipment e.g. external beacons/sounders or monitoring systems.

LCD indicator panels comprise a stainless steel fascia fitted with a 16 character LCD display, an integral sounder, and mute button. The MUTE button is annotated in black with the word **MUTE**. Alternative annotation is available on request.

Panels can be supplied with flush or surface steel back boxes.


NOTE: REMOTE INDICATOR PANELS CANNOT BE USED TO RESET ALARMS. DISABLED TOILETS ALARMS CAN ONLY BE RESET AT THE TOILET 'RESET UNIT' TO ENSURE STAFF ATTENDANCE IN THE EVENT OF AN ALARM ACTIVATION.



SPECIFICATIONS

Faceplate:	Brush finished stainless steel, with black annotation
Mounting:	Surface or flush mount back box, anti-tamper fixings
Back box surface:	Mild steel, black painted
Back box flush:	Mild steel, galvanised
Dimensions:	Width: 190 mm, height: 127 mm (approx.)
Display:	16 character LCD
Audible Alert:	Integral sounder
Power:	12 / 24 V dc (Usually supplied from battery backed system PSU)

CONNECTIONS

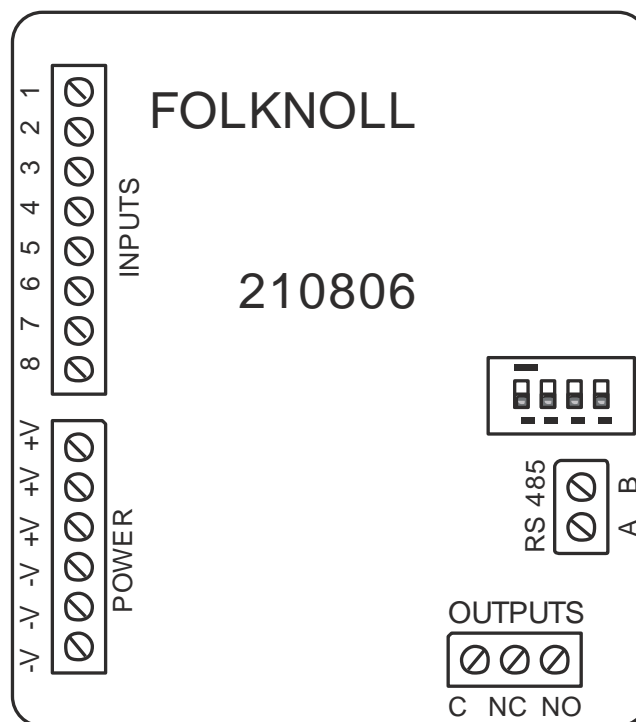

ABOUT FOLKNOLL

We are a UK based company with over 30 years of design and manufacturing experience. All our products and systems are designed for toughness, reliability, easy installation, simple configuration, straightforward operation and low maintenance.

If you need custom engraved panels, additional features or special systems, contact us and we will be pleased to discuss your requirements.

For further information about our wide range of products and services contact us at:

Folknoll Group Ltd.

Old North Rd, Royston, HERTS, SG8 5DT, UK

+44 (0) 1763 234567 sales@folknoll.co.uk www.folknoll.co.uk