**EMERGENCY ASSISTANCE ALARMS** 



#### ABS PULL CORD ALARM ACTIVATOR

3000mm cord

2 pull handles for high-level and low-level activation

Reassurance LED - indicates alarm status

Can be daisy chained for multiple alarm activation points

**Tough ABS construction** 

**Anti-tamper fixings available** 

Surface mount - fits round conduit box / BESA box

Ideal for public places, hospitals, hotels, etc.

**Compatible with Folknoll remote monitoring** 

# **EMERGENCY ASSISTANCE ALARMS**

Folknoll emergency assistance alarm systems offer cost-effective, vandal resistant, **BS 8300-2** and **DOCUMENT M** compatible solutions built from standard and bespoke units. Our alarms can be combined with disabled refuge EVCS and other systems. Ideal for **SHOPS**, **OFFICES**, **HOTELS** and other **PUBLIC SPACES**.

#### **PULL CORD UNITS**

Pull cords, alarm strips and call points are used to call for assistance in emergency. The units are mounted in strategic locations in accordance with current standards, enabling distressed persons to activate alarms. Depending on the system configuration, beacons, sounders and remote monitoring units will be used to alert staff and others to respond to incidents.

### DT7520.00: PULL CORD ABS

Our DT7520.00 Pull Cord ABS is a tough ABS, BESA, ceiling mount, alarm pull cord unit with a red reassurance LED.

#### PULL CORD HANDLES

The unit is usually supplied with 3000mm cord and two pull handles, offering high-level and low-level activation points. The handles can be located anywhere along the cord to comply with local regulations, specifications and requirements. Alternative cord lengths and additional pull handles are available on request.

#### REASSURANCE LED

The reassurance LED mimics the operation of the overdoor beacon to indicate the state of the local alarm. Giving users local reassurance that the alarm has been activated, etc. The exact behaviour of this LED will depend on the type of alarm control system used. Typically, the LED flashes in the alarm activated state and is illuminated continuously in the alarm acknowledged state.

### **FACEPLATE / ENCLOSURE**

The pull cord is supplied in a tough, surface mount, ABS cover. Alternative enclosures are available on request.

## **MOUNTING**

The unit designed to be surface mounted on a suitable ceiling or fitted to a standard round conduit / BESA box.

### **SPECIFICATIONS**

Pull cord: 3000mm cord with 2 pull handles for high-level and low-level activation

Indicator: Red reassurance LED Faceplate / ABS cover, white finish


Enclosure:

Mounting: Surface mount, fits round conduit / BESA box (not supplied)

Dimensions: Diameter: 78mm, depth: 40mm (approx.)

Power: 12Vdc / 24Vdc

## **CONNECTIONS**

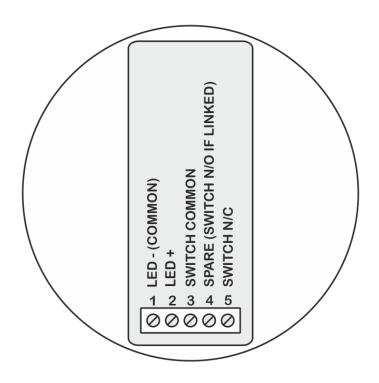

### ABOUT FOLKNOLL

We are a UK based systems design, manufacturing and installation company. Since 1975 we have been supplying tough, reliable, practical, alarm and control systems for the private and public sectors. All of our products and systems have been designed for easy installation and low maintenance by experienced engineers. As original manufacturers, all of our products and systems can be customised to suit your requirements. We also offer individual annotation, custom engraving and special finishes for all of our equipment.

### **GET IN TOUCH**

Please contact us for further information about our wide range of products and services and find out how we can provide a solution for you.



+44 (0) 1763 234567

enquiries@folknoll.co.uk