



VANDAL RESISTANT ALARM CONTROLLER WITH RESET BUTTON

Illuminated reset button with activation delay

Input for pull cords, call points, etc.

Output for beacon sounders

Tough, stainless steel, construction

Mounts in standard UK, 35mm, single gang, back box

Anti-tamper fixings available

Suitable for use in public areas

EMERGENCY ASSISTANCE ALARMS

Folknoll emergency assistance alarm systems offer cost-effective, vandal resistant, **BS 8300-2** and **DOCUMENT M** compatible solutions built from standard and bespoke units. Our alarms can be combined with disabled refuge EVCS and other systems. Ideal for **SHOPS, OFFICES, HOTELS** and other **PUBLIC SPACES**.

FOLKNOLL ALARM CONTROLLER RESET UNITS

Our reset units are local alarm controllers with integral reset buttons. These units continually monitor pull cords, call points, etc. activating beacon sounders and other indicators when an alarm is triggered. The reset button is used to cancel and reset the alarm after an incident has been resolved. Reset units are usually installed inside the alarm zone to ensure alarm responders visit the location in response to an alarm.

DT7540.00F: ALARM RESET BASIC

The DT7540.00F Alarm Reset Basic offers a basic alarm controller with an illuminated reset button.

ACTIVATION DELAY

When used in conjunction with Folknoll emergency assistance alarms, this button must be held for a minimum of 0.25 seconds before it will operate. Reducing the risk of accidental operation.

BUTTON ILLUMINATION

The button illumination is usually wired to mimic the action of the over-door beacon, giving the user positive visual alarm state indication within the alarm zone. Other configurations available on request.

FACEPLATE

The standard faceplate is made from brushed finish stainless steel with bold back, silk screened, English, annotation. Other finishes and alternative annotation are available on request.


MOUNTING

The unit is designed for mounting in a standard >35mm, single gang, UK back box. Anti-tamper fixings are available on request.

SPECIFICATIONS

Button:	Vandal resistant, red LED illuminated push button (other colours available on request)
Controller:	Basic alarm system without the acknowledge function (not BS 8300-2 compatible)
Faceplate:	Brushed finish stainless steel with black annotation (other options available on request)
Mounting:	Standard UK, 35mm, single gang, back box (not supplied)
Dimensions:	Width: 86mm, height: 86mm, depth: <35mm (approx.)
Power:	12Vdc / 24Vdc

CONNECTIONS

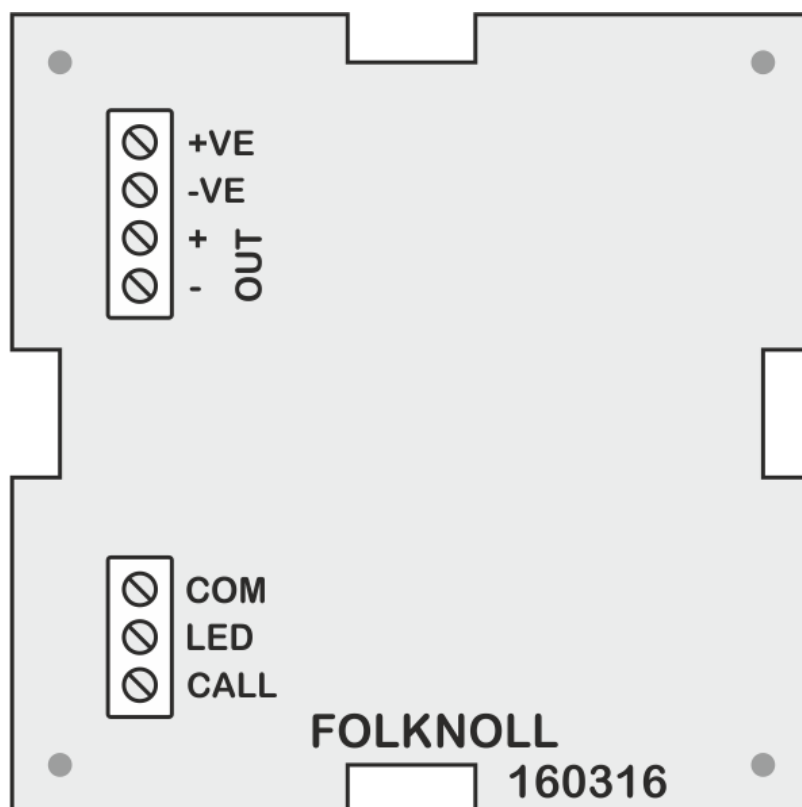

ABOUT FOLKNOLL

We are a UK based systems design, manufacturing and installation company. Since 1975 we have been supplying tough, reliable, practical, alarm and control systems for the private and public sectors. All of our products and systems have been designed for easy installation and low maintenance by experienced engineers. As original manufacturers, all of our products and systems can be customised to suit your requirements. We also offer individual annotation, custom engraving and special finishes for all of our equipment.

GET IN TOUCH

Please contact us for further information about our wide range of products and services and find out how we can provide a solution for you.



19 Old North Rd, Royston, HERTS, SG8 5DT, UK

Folknoll Group Ltd

www.folknoll.co.uk

+44 (0) 1763 234567

enquiries@folknoll.co.uk