



#### ALARM INDICATOR PANEL FOR UP TO 8 ALARMS

BS 8300-9 compliant

Alerts staff to system alarms and faults

16-character LCD display

Mute button

Integral sounder

Output for auxiliary beacons / sounders

Vandal resistant, stainless steel, construction

Flush or surface mount, anti-tamper fixings available

Suitable for use in public areas

### EMERGENCY ASSISTANCE

Folknoll emergency assistance alarm systems offer cost-effective, vandal resistant, **BS 8300-2** and **DOCUMENT M** compatible solutions built from standard and bespoke units. Our alarms can be combined with disabled refuge EVCS and other systems. Ideal for **SHOPS, OFFICES, HOTELS** and other **PUBLIC SPACES**.

### ALARM INDICATOR PANELS

Alarm indicator panels are installed in permanently staffed locations, e.g. receptions or security control rooms, to indicate alarm activation. If required, Folknoll panels can be daisy-chained to provide alarm indication in multiple locations.

### DT7550.80: LCD INDICATOR PANEL

Our DT7550.80 LCD Indicator Panel comprises a stainless-steel faceplate and control board with a 16-character LCD display, an integral sounder and a mute button. The faceplate is annotated in black with the word **MUTE**. Alternative finishes and annotation are available on request. Flush and surface mount steel back boxes can be supplied as required.

### STANDARD ALARM ZONES

This unit can monitor up to 8 standard emergency assistance alarms zones.

### ALARM ZONES WITH FAULT MONITORING

Alternatively, this unit can monitor up to 4 emergency assistance alarm zones with fault monitoring.

### MUTE FUNCTION

The mute function silences the alarm integral alarm sounder to facilitate communication, etc.

### NO RESET FUNCTION

Remote indicator panels cannot usually be used to reset alarms.

**BS Compliant emergency assistance alarms can only be reset at the local 'reset unit' to ensure staff attendance to alarms.**


### APPLICATION

This unit is designed for mounting in permanently staffed areas e.g. hotel receptions and building security rooms to alert staff to emergency assistance alarms and faults.

## **SPECIFICATIONS**

Display:	16-character LCD
Audible alert:	Integral buzzer, 400Hz, 75dB at 300mm
Mute:	Large, vandal resistant, push button with alarm state indication LED, red (other colours by request)
Power:	12Vdc / 24Vdc (usually supplied from a battery backed, system, PSU)
Faceplate:	Brushed finish stainless steel with black, silkscreened, annotation (other options by request)
Dimensions:	Width: 130mm, height: 190mm (approx.)
Mounting:	Surface or flush mount back box (anti-tamper fixings available)
Back box surface:	Mild steel, black painted
Back box flush:	Mild steel, galvanised

## **CONNECTIONS**

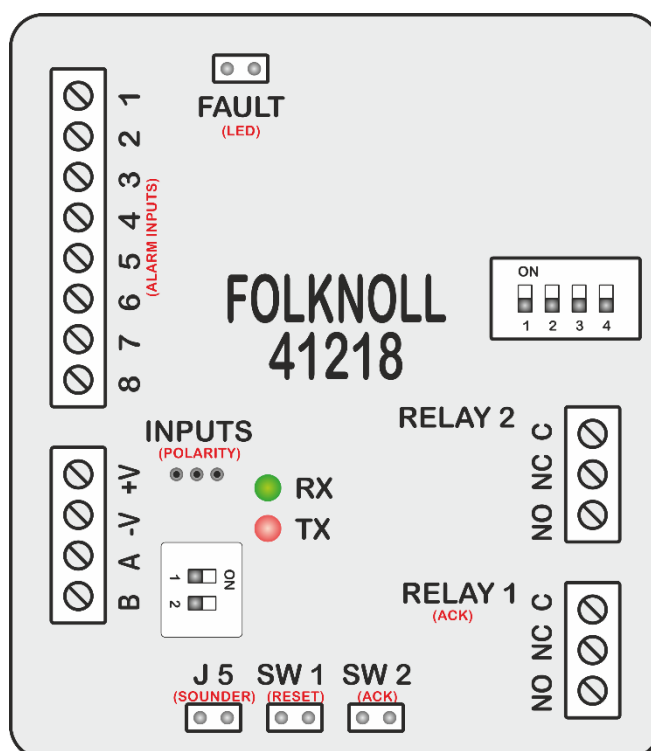

## **ABOUT FOLKNOLL**

We are a UK based systems design, manufacturing and installation company. Since 1975 we have been supplying tough, reliable, practical, alarm and control systems for the private and public sectors. All of our products and systems have been designed for easy installation and low maintenance by experienced engineers. As original manufacturers, all of our products and systems can be customised to suit your requirements. We also offer individual annotation, custom engraving and special finishes for all of our equipment.

## **GET IN TOUCH**

Please contact us for further information about our wide range of products and services and find out how we can provide a solution for you.